


PSS-2236

DENSONS HEAT SHRINKABLE STRAIGHT JOINTS UPTO 36 kV For PILC 'H' Type Cable

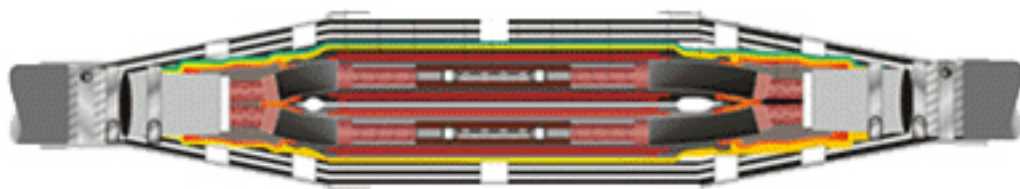

In conformance with BS 6480, IEC 55 (Part I & II), VDE 0255, IS 692

Specifications

TEST	TYPE PSS - 2236
A.C. Voltage withstand	75 kV / 1 min
D.C. Voltage withstand	144 kV / 30 min.
Impulse Voltage withstand (10+VE & 10-VE Shots)	170 kV

Ordering Information

CABLE SIZE (Sq. mm)	FOR 36 kV (Kit Code)	
3 x 35 - 70	PSS - 31	Enquiry
3 x 95 - 150	PSS - 32	Enquiry
3 x 185 - 300	PSS - 33	Enquiry
3 x 400	PSS - 34	Enquiry

CABLE SIZE (Sq. mm)	FOR 22 kV (Kit Code)	
3 x 25 - 50	PSS - 21	Enquiry
3 x 70 - 95	PSS - 22	Enquiry
3 x 120 - 150	PSS - 23	Enquiry
3 x 185 - 240	PSS - 24	Enquiry
3 x 300 - 400	PSS - 25	Enquiry