


Heat Shrinkable Anti Tracking Right Angle Boot

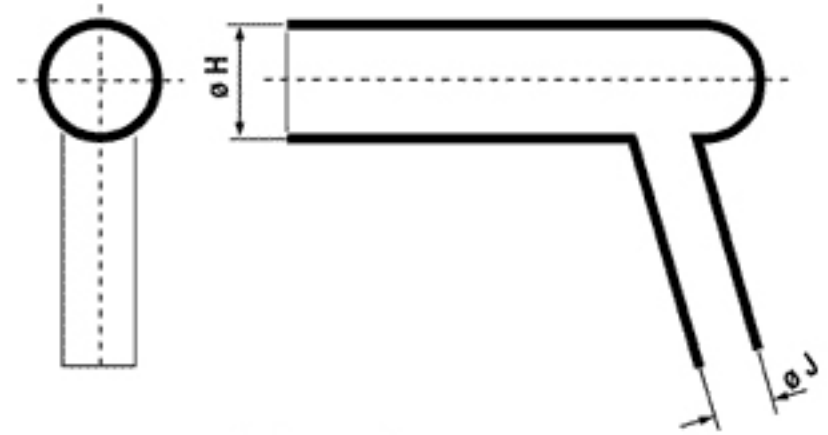

All Dimensions Are In mm

Features

- Designed for medium voltage applications up to 36 KV
- Shaped components to meet a variety of configuration requirements
- Continuous operation temperature: -55°C to 120°C
- Used in protecting cable and up to 36 KV against flashover or surges induce during working life in switch gear in and transformer boxes.

Technical Data

Property	Requirements	Test Method
Tensile Strength	8N/mm ² (min.)	ASTM D412, ESI 09-13
Elongation	200% (min)	ASTM D412, ESI 09-13
Heat Aging (500 hrs. at 120 ⁰ C)		
Tensile Strength	7N/mm ² (min.)	ASTM D412
Elongation	200% (min.)	ASTM D412
Cold Temperature Flex (-40°C)	No cracking	ASTM D2671
Electrical		
Dielectric Strength	10 kV/mm (min.)	ASTM D149, IEC 243
Volume Resistivity	1×10^{12} ohm-cm (min.)	ASTM D257
Track Resistance	Non-Tracking	ASTM D2303
Chemical Resistance		
Tensile Strength	7N/mm ² (min.)	ASTM D412
Elongation	200% (min.)	ASTM D412

Ordering Information

Code	Expanded		Recovered		
	ϕH (max.)	ϕJ (min.)	ϕH (max.)	ϕJ (min.)	
DRAB - 1	75	36	35	18	Enquiry
DRAB - 2	75	50	35	26	Enquiry
DRAB - 3	95	67	35	26	Enquiry