


XSS/1115/2236

DENSONS HEAT SHRINKABLE STRAIGHT JOINTS UPTO 36 kV For XLPE/EPR Insulating Cable

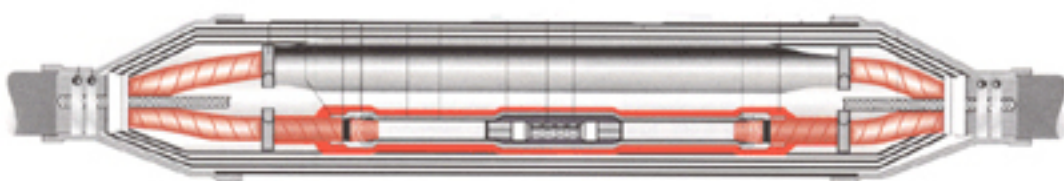

In conformance with VDE 0278 & IS:13573

Specifications

TEST	TYPE XSS - 1115 (15kv)	TYPE XSS - 2236 (36kv)
A.C. Voltage withstand	45 kV / 1 min	75 kV / 1 min
D.C. Voltage withstand	48 kV / 30 min.	144 kV / 30 min.
Impulse Voltage withstand (10+VE & 10-VE Shots)	75 kV	170 kV
Corona Extinction Voltage	More than 13 kV	More than 38 kV

Ordering Information

CABLE SIZE (Sq. mm)	FOR 33 kV (Kit Code)	
3 x 35 - 70	XSS - 31	Enquiry
3 x 95 - 150	XSS - 32	Enquiry
3 x 185 - 300	XSS - 33	Enquiry
3 x 400	XSS - 34	Enquiry

CABLE SIZE (Sq. mm)	FOR 22 kV (Kit Code)	
3 x 25 - 50	XSS - 21	Enquiry
3 x 70 - 95	XSS - 22	Enquiry
3 x 120 - 150	XSS - 23	Enquiry
3 x 185 - 240	XSS - 24	Enquiry
3 x 300 - 400	XSS - 25	Enquiry

CABLE SIZE (Sq. mm)	FOR 11kV (Kit Code)	
3 x 16 - 50	XSS - 11	Enquiry
3 x 70 - 95	XSS - 12	Enquiry
3 x 120 - 185	XSS - 13	Enquiry
3 x 240 - 300	XSS - 14	Enquiry
3 x 400 - 500	XSS - 15	Enquiry