


SXP2236

DENSONS HEAT SHRINKABLE TRANSITION JOINT UPTO 36 kV

For XLPE/PILC 'H' Type Cable

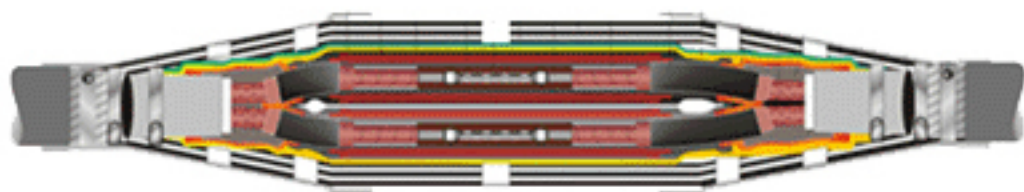

In conformance with IS 13705, IEEE 404, BS 6480, IS 692, IEC 55 (Part I & II), IEC 502 Type

Specifications

TEST	TYPE SXP - 2236
A.C. Voltage withstand	Dry: AC 75 kV / 1 min.
D.C. Voltage withstand	144 kV For 30 min.
Impulse Voltage withstand (10+VE & 10-VE Shots)	170 kV

Ordering Information

CABLE SIZE (Sq. mm)	FOR 33 kV (Kit Code)	
3 x 35 - 70	SXP - 31	Enquiry
3 x 95 - 150	SXP - 32	Enquiry
3 x 185 - 300	SXP - 33	Enquiry
3 x 400	SXP - 34	Enquiry

CABLE SIZE (Sq. mm)	FOR 22 kV (Kit Code)	
3 x 25 - 50	SXP - 21	Enquiry
3 x 70 - 95	SXP - 22	Enquiry
3 x 120 - 150	SXP - 23	Enquiry
3 x 185 - 300	SXP - 24	Enquiry
3 x 400 - 500	SXP - 25	Enquiry